


# SPECIFICATIONS FOR PAIR KNOCK DOWN FRAMES

DoormartUSA has a full range of knock down (KD) frames of standard sizes and profiles. Knock down (KD) frames are available in 16 gauge for 1 3/4" doors. All standard knock down frames are manufactured from galvanized steel and are prepared and reinforced to receive specific architectural hardware in accordance to ANSI A115 Standards.

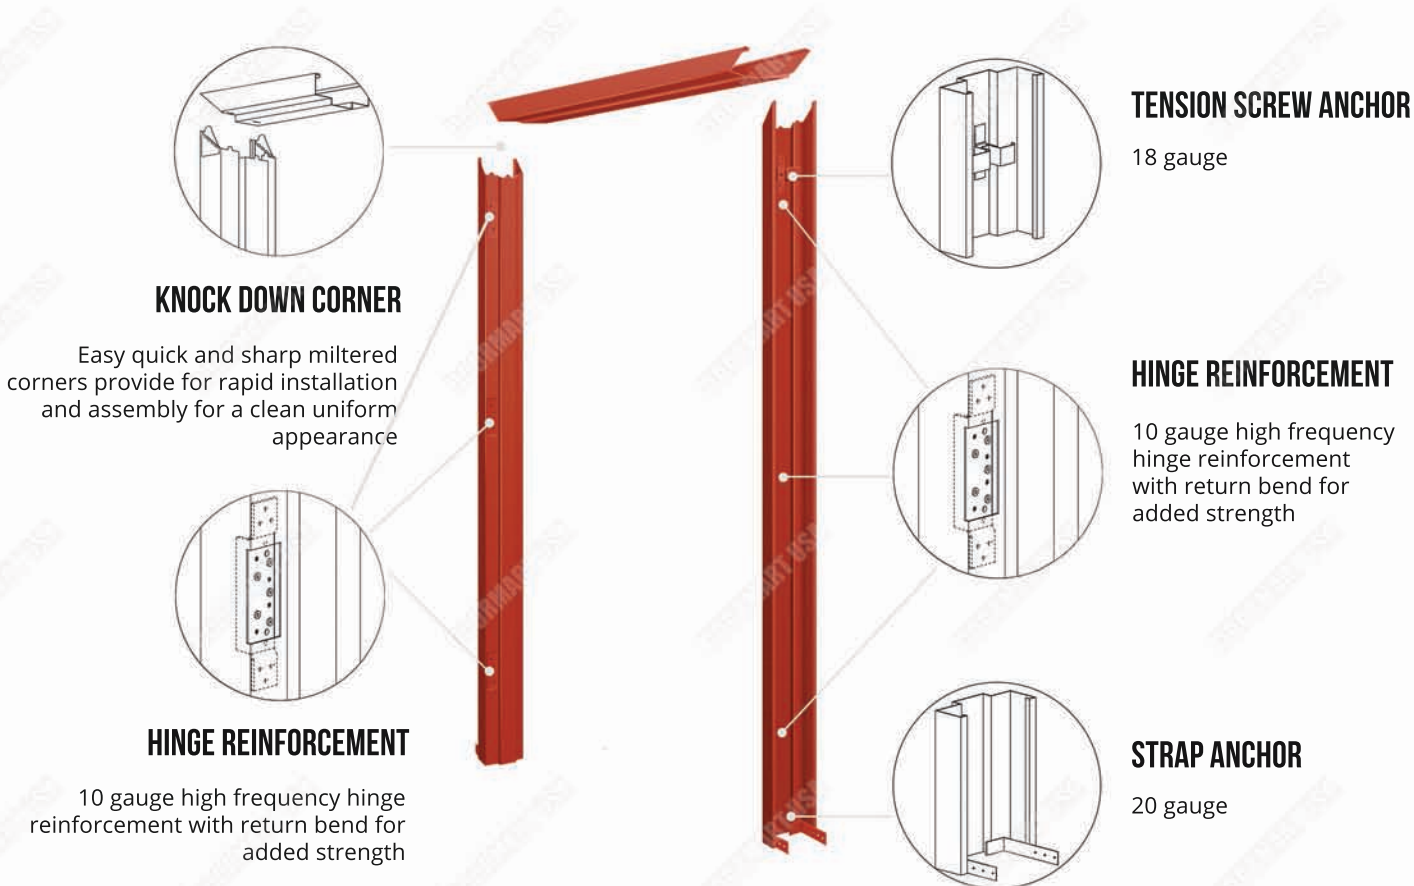

- Standard knock down (KD) frame widths range from 2'-0" to 4'-0" in 2" increments with height 6'-0", 6'-8", 7'-0", 7'-10" and 8'-0". Throat sizes range from 3 3/4" to 7 1/4".
- Standard knock down (KD) for pair doors widths range from 3'-0" to 8'-0" in 2" increments with height 6'-8", 7'-0", 7'-10" and 8'-0". Throat sizes range from 3 3/4" to 7 1/4".
- Jambs are prepared and reinforced to receive 3 standard weight 4 1/2 x 4 1/2 butt hinges for 6'-0", 6'-8" and 7'-0" height and 4 standard weight 4 1/2 x 4 1/2 butt hinges for 7'-10" and 8'-0".
- Jambs are supplied with appropriate wall anchors.
- Available Ratings: 3h, 1 1/2 h, 45 min. Fire labeled steel frames must be installed with an equivalent fire labeled door with approved fire listed hardware.