


SPECIFICATIONS FOR KNOCK DOWN FRAMES - TRIMMED OPENING

Doormart USA has a full range of knock down (KD) frames of standard sizes and profiles. Knock down (KD) frames are available in 16 gauge for 1 3/4" doors. All standard knock down frames are manufactured from galvanized steel and are prepared and reinforced to receive specific architectural hardware in accordance to ANSI A115 Standards.

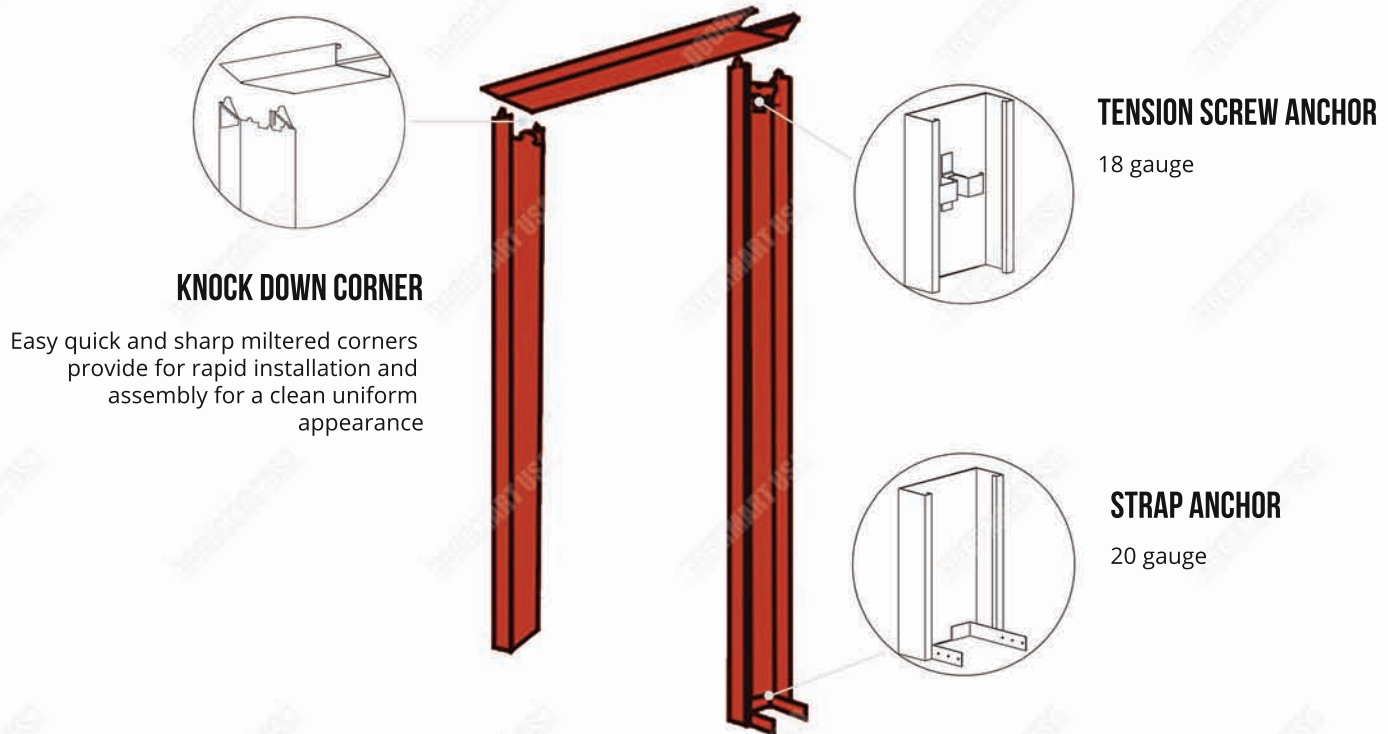

- Standard Trimmed Opening Knock Down (KD) frame widths range from 2'-0" to 8'-0" in 2" increments with height 6'-0", 6'-8", 7'-0", 7'-10" and 8'-0". Throat sizes range from 3 3/4" to 7 1/4".
- Jambs are supplied with appropriate wall anchors.