

# Strikes & Accessories




## Strikes for use with 9860 vertical rod exit device

All strikes are black nylon coated


### 221

Standard for 9860.  
Applied to surface of floor or to a flat threshold.  
Standard packaging.




### 227

Applied to surface of stop.  
No mortise required.  
Standard packaging.



### 233


Bottom strike. Alternate bottom strike. Flush mounting stainless steel. Furnished with expansion shields. Requires mortise in the floor.




## Strikes for use with 9800 rim type exit device

### 239

For 9800 & F9800 surface applied.  
Standard packaging

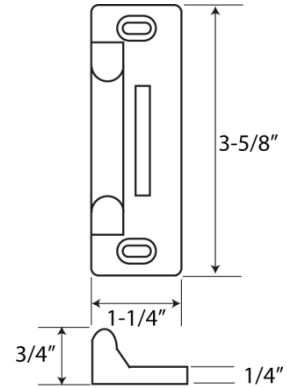


### RIM238




Strike for 2 3/8" Backset Application

## Strikes for FMCVR9800, MCVR9800, WCVR9800, FWCVR9800, GLSCVR9800 fire and non-fire exit device

### 260 TOP STRIKE

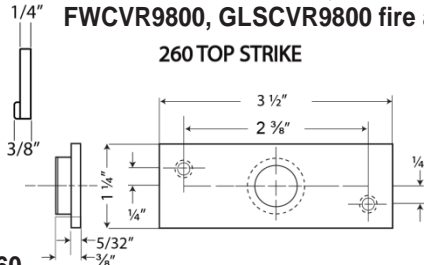


### 265 BOTTOM STRIKE



## Strikes for use with F9860 vertical rod fire rated exit device

### 245


Surface applied for F9860.  
Standard packaging.



## Strikes for use with GLS9800 Narrow Stile Exit Device


### 246

Used on frames with blade stop or integral stop. Surfaced applied or mortised.  
Standard packaging.




### 247

Applied to surface of stop.  
No mortise required.




### 245

For F9800 surface applied.  
Standard packaging.




### 233

Bottom strike for F9860.  
Flush mounting stainless steel. Furnished with expansion shields. Requires mortise in the floor.  
Standard packaging.




## Overlapping Strikes N251

Surface applied. Used on inactive leaf for device on active leaf of pair of doors without mullion



## Additional Accessories LFF

Lock front filler



## SF

Strike filler

