



335S

Silicone Mortise Automatic Door Bottom

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

Material

Aluminum Alloy 6063, T5 Temper
Synthetic Rubber Polymer: Siloxane Closed Cell Sponge
Silicone Is Gray


- ▶ Excellent Flexibility and Memory
- ▶ Flame-Resistant
- ▶ Moisture-Resistant
- ▶ Temperature range -100°F to 500°F, Remains Flexible at Extreme Temperatures
- ▶ Excellent Resistance to Ozone, UV and Aging
- ▶ Recommended for Areas Using FM200 or Halon Fire Suppression Systems
- ▶ Use with a Threshold for Maximum Sealing Capability
- ▶ Nylon Brush Recommended for Carpet Applications where no Threshold is Provided
- ▶ Specify Exact Net Length Required to Avoid Field Sizing
- ▶ 36" and longer may be Cut up to 4" in the Field, under 36" should not be Cut in the Field, Order Net Length
- ▶ End Caps Furnished Standard
- ▶ Furnished 1/2" Shorter than Ordered to Fit within Net Door Size. (i.e. 36" is Furnished 35 1/2")
- ▶ Available 23 1/4" Net to 48" in Length
- ▶ Fits Wood Fire Door Mortise Restrictions
- ▶ Mortise Required 5/8" x 1 9/16"
- ▶ 3/4" Max Drop

Finish

Mill Aluminum



STC 52 with STC2 Option
STC 45 with STC2-PR Option for Pairs of Doors

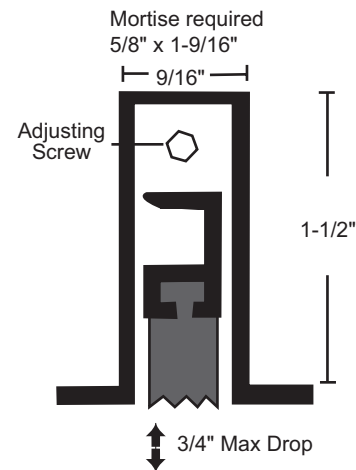

NGP-GKT-335S-PCS-10323-A

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

ngp.com
1-800-NGP-RUSH