



## Self-Adhesive Silicone Gasketing



- 5050B** Brown
- 5050C** Charcoal
- 5050W** White
- 5050T** Tan
- 5050CL** Clear

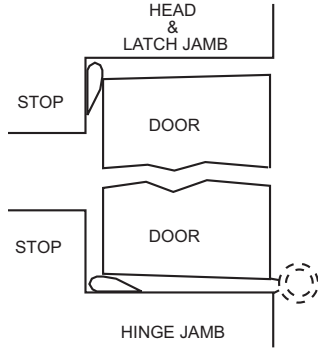

### Silicone Bulb Fire and Smoke Seal




**Edge Sealing System - Category "G" for 20 minute rated category B wood doors perimeter application up to:**  
 single swing 4'0 x 8'0  
 pairs 8'0 x 8'0  
 use 9550 at the meeting edge of pairs



**Smoke and Draft Control - Category "H"**  
 Up to 3 hours steel fire doors  
 Up to 90 minutes wood fire doors





Meets requirements of ROHS Directive 2002/95/EC  
 Available in 17', 20', 21', 25' and 300' rolls.



- 2525B** Brown
- 2525C** Charcoal
- 2525W** White
- 2525T** Tan

### Silicone Bulb Smoke Seal



Available in 17', 20', 21', 25' and 300' rolls.



- 5040B** Brown
- 5040W** White

### Silicone Fin Smoke Seal

Available in 17', 20', 25', 300' rolls



- 5060B** Brown
- 5060CL** Clear

### Silicone Fin Smoke Seal

Available in 17' and 21' rolls.



**Adhesive specifications:** Modified acrylic pressure sensitive adhesive protected by release liner. Provides high initial adhesion and long term holding power for permanent mounting in exterior or interior locations. Resistant to aging, weathering, UV radiation, water, detergent, alcohol and the influence of chemicals. End use temperature range, long term exposure 0°F up to 190°F; short term exposure 0° F up to 400° F. Shelf life of adhesive prior to installation is one year when stored at 75°F and 50% relative humidity or less.